



# Flog / Micro 60

Designed for rough environments that require high durability general lighting, providing uniform light distribution. The protected luminaire will resist humidity, water, dust, & extreme high/low temperatures.



## Specifications

Material	Polycarbonate		
Mounting Type	Surface Mounted		
Dimensions (LxWxH)	600 x 104 x 80mm		
Input Voltage	220-240V		
Power	10W		
CRI	70+		
CCT	3000K	4000K	6000K
Luminaire Lumen Output	950lm	1000lm	1100lm

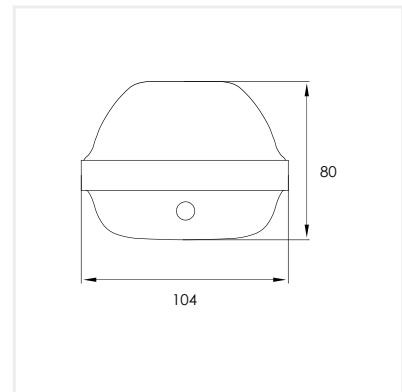

<b>CCT</b>	<b>A</b>	<b>Motion Sensor</b>	<b>B</b>	<b>Emergency</b>	<b>C</b>
3000K	30	Without	0	Without	0
4000K	40	With	1	1.5hrs	2
6000K	60			3hrs	3

## Product Code

