


Iris / S Solo IP 44



A recessed fixture with a single spot, featuring a tiny aperture. Designed for outdoor spaces in a 60 mm squared die-cast aluminum housing. Iris is designed to deliver a high level of glare-free visual comfort.



Luminaire

Product type: Downlight
 Material: Diecast Aluminum / PMMA Cover
 Finish: White, Grey, Black, Custom

Installation

Environment: Indoor
 Ceiling Type: Gypsum, wood
 Mounting: Recessed
 Dimensions (L x W - H): 60mm x 60mm - 45mm
 Cutout Dimensions (φ): 54mm
 IP: 44

Light Source


Lumen output: From 940lm to 1335lm
 Power: 9W

Optics


Light controller type: Reflector
 Light emission beam: 15°, 25°, 38°
 CRI: 80+, 90+

Electrical Equipment


Mains voltage (V): 24
 Dimming Type: On/Off, Dali, 1-10V, Phase Dimming

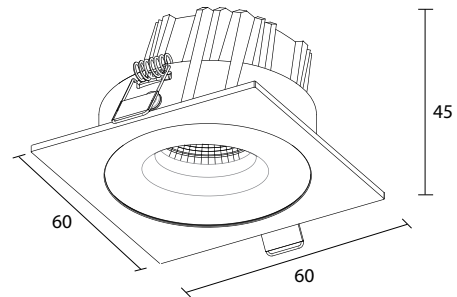


Polar Curves & LOR



Beam Angle 15°
LOR: 70%



Beam Angle 25°
LOR: 72%



Beam Angle 38°
LOR: 75%

Iris / S Solo IP 44



Product Reference:

| Designation | CCT | LED Luminous Output | | Product Code* |
|--------------|---------------|---------------------|--------|------------------------|
| | | Power 9W | | |
| | | CRI | | |
| | | 80 | 90 | |
| IS06S | 2700 K | 1125lm | 940lm | IS06S.A27.B.CDE |
| IS06S | 3000 K | 1175lm | 980lm | IS06S.A30.B.CDE |
| IS06S | 4000 K | 1225lm | 1050lm | IS06S.A40.B.CDE |
| IS06S | 5000 K | 1335lm | - | IS06S.A50.B.CDE |

* Check the below table to build the code

| | | | | | | | | | | | |
|------------|----------|------------|----------|--------------|----------|-------------------|----------|----------------|----------|---------------|----------|
| CRI | A | CCT | - | POWER | B | BEAM ANGLE | C | DIMMING | D | FINISH | E |
| 80+ | 8 | 2700K | 27 | 9W | 09 | 15° | 1 | On/Off | 1 | Black | 1 |
| 90+ | 9 | 3000K | 30 | | | 25° | 2 | Dali | 2 | Grey | 2 |
| | | 4000K | 40 | | | 38° | 3 | 1-10V | 3 | White | 3 |
| | | 5000K | 50 | | | | | Phase | 4 | Custom | 4 |

Product Code: