


Ivy / S Solo IP 65



A recessed fixture with a single spot, featuring a tiny aperture. Designed for outdoor spaces in a protected 70 mm squared die-cast aluminum housing. Ivy is designed to deliver a high level of glare-free visual comfort.



Luminaire

Product type: Downlight
 Material: Diecast Aluminum / PMMA Cover
 Finish: White, Grey, Black, Custom

Installation

Environment: Outdoor
 Ceiling Type: Gypsum, wood
 Mounting: Recessed
 Dimensions (L x W - H): 70mm x 70mm - 52mm
 Cutout Dimensions (φ): 62mm
 IP: 65

Light Source


Lumen output: From 1200lm to 1820lm
 Power: 9W, 12W

Optics


Light controller type: Reflector
 Light emission beam: 15°, 25°, 38°, 60°
 CRI: 80+, 90+

Electrical Equipment


Mains voltage (V): 24
 Dimming Type: On/Off, Dali, 1-10V, Phase Dimming

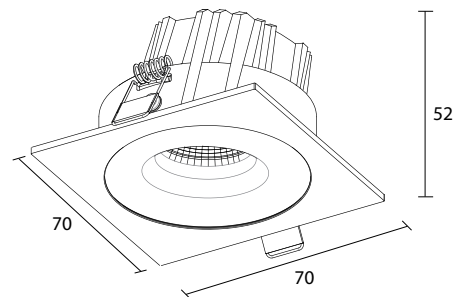


Polar Curves & LOR




Beam Angle 15°
LOR: 89%



Beam Angle 25°
LOR: 90%



Beam Angle 38°
LOR: 91%



Beam Angle 60°
LOR: 92%

Ivy / S Solo IP 65



Product Reference:

Designation	CCT	LED Luminous Output				Product Code*
		Power 9W		Power 12W		
		CRI				
		80	90	80	90	
IN07S	2700 K	1200lm	1000lm	1630lm	1360lm	IN07S.A27.B.CDE
IN07S	3000 K	1250lm	1040lm	1695lm	1415lm	IN07S.A30.B.CDE
IN07S	4000 K	1300lm	1115lm	1760lm	1515lm	IN07S.A40.B.CDE
IN07S	5000 K	1340lm	1135lm	1820lm	1535lm	IN07S.A50.B.CDE

* Check the below table to build the code

CRI	A	CCT	-	POWER	B	BEAM ANGLE	C	DIMMING	D	FINISH	E
80+	8	2700K	27	9W	09	15°	1	On/Off	1	Black	1
90+	9	3000K	30	12W	12	25°	2	Dali	2	Grey	2
		4000K	40			38°	3	1-10V	3	White	3
		5000K	50			60°	4	Phase	4	Custom	4

Product Code: