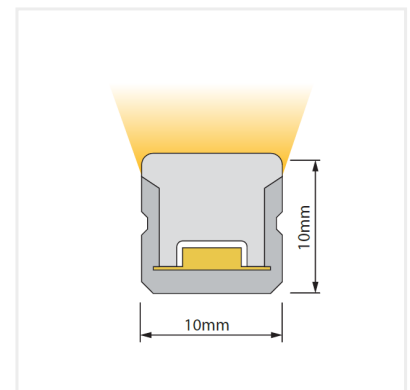# Flex Mark - IP67

A flexible light source that can be used for decoration, guidance lighting, or architectural and interior outlines providing high-performance color render and consistency. Arlus Flex Mark is available in a variety of options all waterproof and anti-dust strips that allow versatile outdoor applications with high impact resistance.

ARLUS
ÉCLAIRAGE

| IP 67 | CE | RoHS | F | |

Specifications

Luminaire

Product type	Neon flex
Material	Silicone
Bending	Vertical
Dimensions	10x10mm
Unit Cut	50mm
Maximum Runing Length	15m
Lumen Output	823lm @3000K
Power	9.1W/m
CRI	80
Driver	Remote
Mains Voltage	24VDC
Dimming	On/Off, DALI, 1-10V

10mm
10mm

CCT	A		DIMMING	B
2700K	27		ON/OFF	1
3000K	30		DALI	2
4000K	40		1-10V	3
5000K	50			

Product Code:

Order Code:

Flex Mark - IP67

Accessories:

Code	Description	
FM.AP.10.100	Aluminum channel with 5 screws - 1000mm/pc	
FM.FEC2.10	2 Wires Snap Front Connector- With 150mm length white PVC cable (dia 6mm) without metal ring on cable	
FM.AEE.T10	Snap End Cap without cable	
FM.AC.10	Aluminum Mounting Clip	