

Flex Mark - IP67






A flexible light source that can be used for decoration, guidance lighting, or architectural and interior outlines providing high-performance color render and consistency. Arlus Flex Mark is available in a variety of options all waterproof and anti-dust strips that allow versatile outdoor applications with high impact resistance.



Specifications

Luminaire

Product type	Neon Flex
Material	Silicone
Bending Type	Horizontal
Dimensions(WxH)	4x8mm
Bending Diameter	30mm
Unit Cut	25mm
Maximum Running Length	5m
Power	6W/m
CRI	90+
Driver	Remote
Mains voltage (V)	24VDC
Dimming Type	On/Off, DALI, 1-10V
Ambient Temperature	-25°C - 55°C

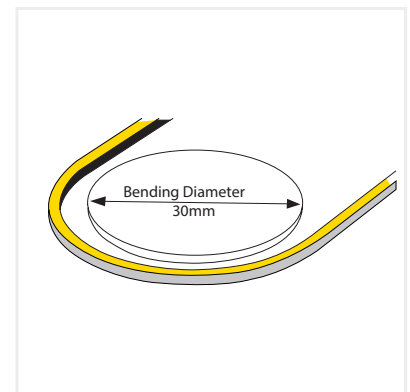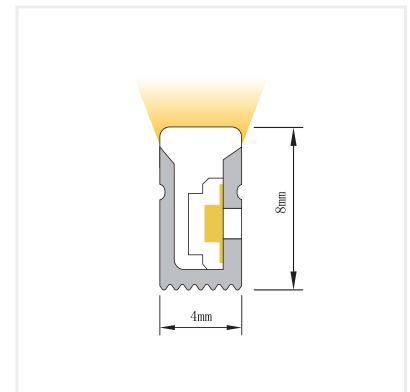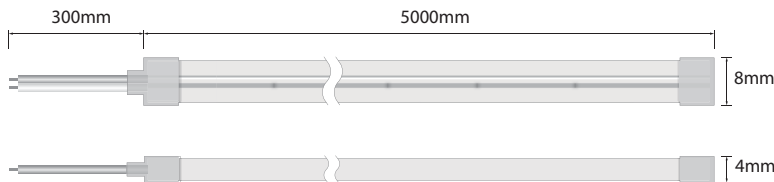

Lumen Output(lm)				
2700K	3000K	3500K	4000K	5300K
240	256	235	250	253




CCT	A	DIMMING	B
2700K	27	ON/OFF	1
3000K	30	DALI	2
3500K	35	1-10V	3
4000K	40		
5300K	53		

Product Code

Order Code

Flex Mark - IP67

Accessories:

Code	Description	
FMH.AP.048.100	Aluminum Profile Dimensions (LxWxH): 1000x6.5x7.2mm Color: Silver	
FMH.AC.048	Aluminum Mounting Clip Set of 1 clip and 1 screw Color: Silver	
FMH.AEE.T048	Silicone End Cap Color: Silver	
FMH.AEL.T048	Front Cable Entry Set of 1 End Cap and 1x30cm Cable 2PIN Color: Semi-transparent	