

Flex Mark - IP67





A flexible light source that can be used for decoration, guidance lighting, or architectural and interior outlines providing high-performance color render and consistency. Arlus Flex Mark is available in a variety of options all waterproof and anti-dust strips that allow versatile outdoor applications with high impact resistance.



Specifications


Luminaire

Product type	Neon Flex
Material	Silicone
Bending Type	Vertical
Dimensions(WxH)	6x6mm
Bending Diameter	50mm
Unit Cut	25mm
Maximum Running Length	5m
Power	6W/m
CRI	90+
Driver	Remote
Mains voltage (V)	24VDC
Dimming Type	On/Off, DALI, 1-10V
Ambient Temperature	-25°C - 55°C

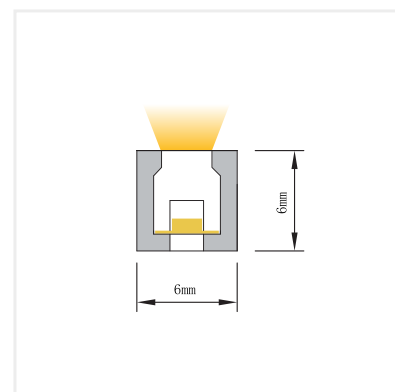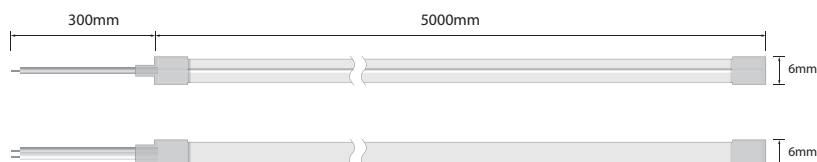

Lumen Output(lm)				
2700K	3000K	3500K	4000K	5000K
340	332	382	372	361

CCT	A	DIMMING	B
2700K	27	ON/OFF	1
3000K	30	DALI	2
3500K	35	1-10V	3
4000K	40		
5000K	50		

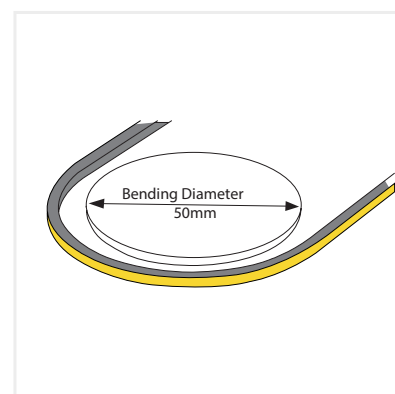

Product Code:

Order Code:

Flex Mark - IP67



Accessories:

Code	Description	
FMV.AP.06.100	Aluminum Profile Dimensions (LxWxH): 1000x8.5x6.1mm Color: Silver	
FMV.AC.06	Aluminum Mounting Clip Dimensions (LxWxH): 15x8.5x6.1mm Color: Silver	
FMV.AEE.T06	Silicone End Cap Color: Transparent	
FMV.FEL.T06	Front Cable Entry Material: Semi-transparent silicone	
FMV.SEL.T06	Side Cable Entry Material: Semi-transparent silicone	
FMV.BEL.T06	Bottom Cable Entry Material: Semi-transparent silicone	