


# Sprint II

A track mounted fixture, designed for indoor spaces in a circular die-cast aluminum housing. The light comes with an adapter for installation on mains electrified track. Sprint II run has an extended light head, to tilt and turn in any direction. The Fixture is available in 4 different sizes.



## Specifications

### Luminaire

|              |                      |
|--------------|----------------------|
| Product Type | Tracklight Spotlight |
| Material     | Aluminum             |
| Finish       | Black, White         |
| Type         | Tilttable            |

### Installation

|                       |                                    |
|-----------------------|------------------------------------|
| Environment           | Indoor                             |
| Mounting              | One Circuit or Three Circuit Track |
| Track Compatibility   | 2, 3, 4, 6 Wires                   |
| IP                    | IP20                               |
| Operating Temperature | -20°C to 45°C                      |

### Light Source


|              |                     |
|--------------|---------------------|
| Light Source | COB                 |
| Power        | 10W, 20W, 30W, 40W  |
| CRI          | 80+                 |
| CCT          | 2700K, 3000K, 4000K |
| MacAdam      | 3                   |

### Optics





|                       |                    |
|-----------------------|--------------------|
| Light Controller Type | Reflector          |
| Light Emission Beam   | 18°, 24°, 40°, 57° |

### Electrical Equipment

|                                    |                                    |
|------------------------------------|------------------------------------|
| Driver                             | Built-In                           |
| Adapter                            | Provided                           |
| Mains Voltage (V)                  | 180-240 VAC, 50/60 Hz              |
| Dimming Type                       | ON/OFF, DALI, 1-10V, Phase Dimming |
| *Dali, 1-10V not available for 20W |                                    |

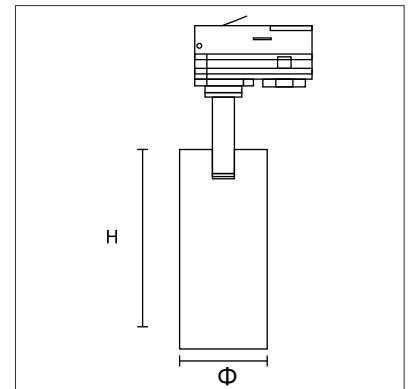

## Polar Curves



# Sprint II



|       | Power (W)        |     |         |     |         |     |         |     |
|-------|------------------|-----|---------|-----|---------|-----|---------|-----|
|       | 10               |     | 20      |     | 30      |     | 40      |     |
|       | Dimensions (mm)  |     |         |     |         |     |         |     |
|       | Φ                | H   | Φ       | H   | Φ       | H   | Φ       | H   |
|       | 62               | 170 | 72      | 186 | 80      | 186 | 94      | 186 |
|       | Luminaire Output |     |         |     |         |     |         |     |
| 2700K | 943 lm           |     | 1906 lm |     | 2831 lm |     | 3775 lm |     |
| 3000K | 993 lm           |     | 2007 lm |     | 2980 lm |     | 3974 lm |     |
| 4000K | 1032 lm          |     | 2085 lm |     | 3096 lm |     | 4129 lm |     |

Product Configuration:

| CCT   | A  | POWER | B  | BEAM ANGLE | C  | FINISH | D | DIMMING | E | CIRCUIT    | F |
|-------|----|-------|----|------------|----|--------|---|---------|---|------------|---|
| 2700K | 27 | 10W   | 10 | 18°        | 18 | BLACK  | 1 | ON/OFF  | 1 | 1 CIRCUIT  | 1 |
| 3000K | 30 | 20W   | 20 | 24°        | 24 | WHITE  | 2 | DALI    | 2 | 3 CIRCUITS | 3 |
| 4000K | 40 | 30W   | 30 | 40°        | 40 |        |   | 1-10V   | 3 |            |   |
|       |    | 40W   | 40 | 57°        | 57 |        |   | PHASE   | 4 |            |   |

**Product Code:**

**Order Code:**